Product information

Micrometer with integrated dial comparator Micromar 40 F

Product features


- · Operating and display units with satin chrome finish
- · Dial comparator is integrated in
- Adjustable tolerance markers
- · Chrome plated steel frame, heat insulated
- Retraction of the movable anvil ensures maximum wear resistance
- · Spindle and anvil are carbidetipped
- · Stainless spindle is hardened throughout and ground
- · Locking device
- · Constant measuring force



instruction manual, case

Application

- · Quick check of diameter of cylindrical parts (shafts, bolts, shanks)
- · Thickness and length measurements
- Particularly suitable for exact series components

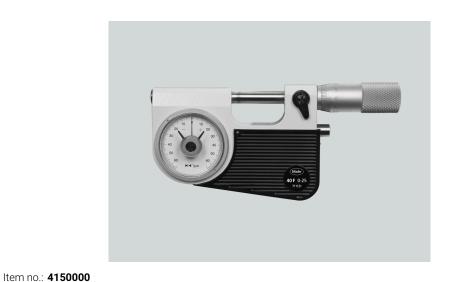

Technical data

Measuring range mm	0 - 25
Graduation value mm	0,01
Graduation value µm	1 μm
Error limit µm	2 μm
Parallel error in µm	1 μm
Flatness in µm	0.2 µm
Error limit Ge (µm)	1 μm
Measuring force	9 N
Figur on dial face	65-0-65
Dial color	White
Material Contact surface	carbide
Spindle diameter	7.5 mm
Spindle thread pitch_mm	0.5 mm

Dimensions

Dimensions e in mm	32 mm
Dimensions b in mm	100 mm
Dimensions a in mm	149 mm
Dimensions c in mm	16 mm
Dimensions d in mm	71 mm

