


Product information

Micrometer with integrated dial comparator Micromar 40 T

Product features

- Operating and display units with satin chrome finish
- Retraction of the movable anvil ensures maximum wear resistance
- Constant measuring force
- Stainless spindle is hardened throughout and ground
- Spindle and anvil are carbide-tipped
- Locking device

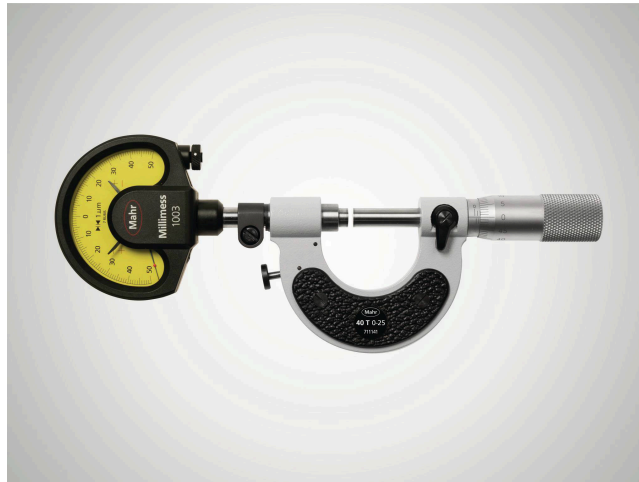

Package contains

instruction manual, case

Item no.: 4154002

Application

- Quick check of diameter of cylindrical parts (shafts, bolts, shanks)
- Thickness and length measurements
- Particularly suitable for exact series components

Technical data

| | |
|-------------------------------------|-------------|
| Measuring range mm | 50 - 100 mm |
| Error limit μm | 2 |
| Parallel error in μm | 2 |
| Flatness in μm | 0.2 |
| Spindle thread pitch mm | 0.5 |
| Graduation value μm | 1 |
| Measuring force | 6.5 |
| Measuring force (N) | 6.5 |
| Error limit G_e (μm) | 1 |

Dimensions

| | |
|--------------------|-----|
| Dimensions e in mm | 8 |
| Dimensions b in mm | 65 |
| Dimensions a in mm | 76 |
| Dimensions c in mm | 5.5 |
| Dimensions d in mm | 30 |

