

Product information

Micrometer with integrated dial comparator Micromar 40 T

Product features


- Operating and display units with satin chrome finish
- Retraction of the movable anvil ensures maximum wear resistance
- Constant measuring force
- Stainless spindle is hardened throughout and ground
- Spindle and anvil are carbide-tipped
- Locking device

Package contains

instruction manual, case

Application

- Quick check of diameter of cylindrical parts (shafts, bolts, shanks)
- Thickness and length measurements
- Particularly suitable for exact series components

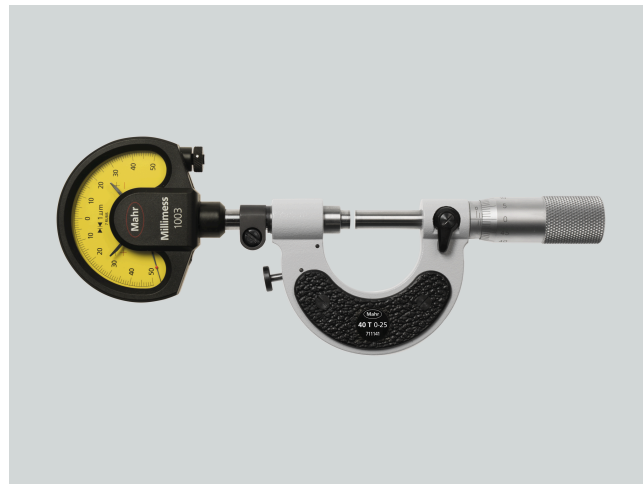

Item no.: 4154004

Technical data

Measuring range mm	150 - 200
Graduation value μm	1 μm
Error limit μm	2 μm
Parallel error in μm	2 μm
Flatness in μm	0.2 μm
Error limit Ge (μm)	1 μm
Measuring force	7.5 N
Spindle thread pitch mm	0.5 mm

Dimensions

Dimensions e in mm	8 mm
Dimensions b in mm	112 mm
Dimensions a in mm	177 mm
Dimensions c in mm	5.5 mm
Dimensions d in mm	30 mm

