

Product information

Motorized dial indicator testing position Precimar ICM 100


Package contains

RS232C null modem cable,
USB cable, Support arm/clamp
Ø12 mm, Reduction clamping
bushing Ø12 mm to Ø8 mm,
power source

Application

For testing of:

- Dial indicators (analog and digital)
- Dial comparators (analog and digital)
- Dial test indicator measuring devices (analog and digital)
- Inductive and incremental probes
- 2-point bore gages

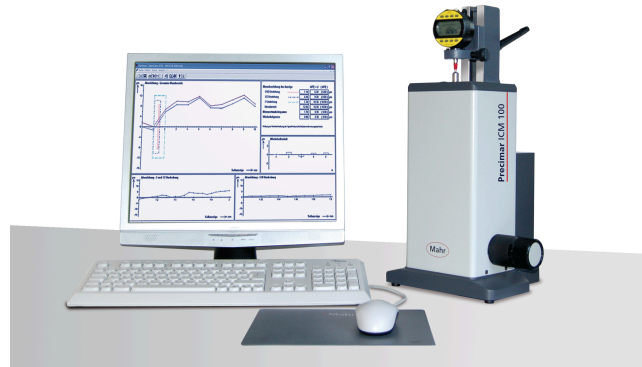

Item no.: **5351005**

Technical data

Direct measuring range [mm]	100
Digital numerical increment [µm]	0,02
Measuring uncertainty MPE_{E1} (L in mm) [µm]	$\leq (0.2 + L/250)$
Device dimensions	235 x 216 x 480