

# Termékinformációk

## Dimenzionális mérés technika Mar4D PLQ 3200-T3

### Terméktulajdonságok

#### • Speed:

- Extremely fast, mechanical-optical workpiece alignment by means of a fully automatic centering and tilting table in combination with the matrix camera
- Axis movements with a unique speed of up to 200 mm/s
- Very fast and high-resolution matrix camera with a large field of view of 15x10 mm (WxH) in effective combination with innovative probe systems
- Joint evaluation of all collected measurement data via MarWin

Cikksz.: 5553203

#### • Productivity:


- Workpieces that were not manufactured between tips are simply clamped in the chuck
- Many different measuring functions combined in one device
- Flexible workpieces with up to D=210 mm, L=730 mm and 20 kg measured directly in production next to the production machines
- Increased measuring capacities and reduced waiting time

#### • Precision:

- Compensation of eccentrics of several millimeters to 1 µm in less than 30 seconds
- Integrated environmental controls, such as active temperature compensation of the device, ensure consistent measurement quality and significantly reduce waste

#### • User-friendliness:

- The ergonomic housing and interior design enables convenient and gentle operation for many hours
- Light curtains and interior monitoring protect people and measuring devices
- All devices are "robot-ready" and automation solutions, such as robot loading, can be implemented quickly and directly via our specialized MES department

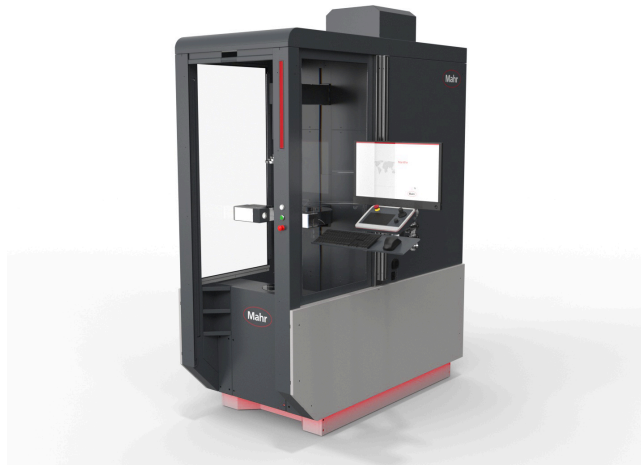

### Műszaki adatok

<b>Elmozdulási / mérési út, X1 tengely</b>	200 mm
<b>Elmozdulási / mérési út Z tengely</b>	730 mm
<b>Pozicionálási sebesség C tengely</b>	0.2 - 60 l/min
<b>Pozicionálási sebesség, X1 tengely</b>	0.5 - 200 mm/s
<b>Pozicionálási sebesség, Z tengely</b>	0.5 - 200 mm/s
<b>Munkadarab hossza, max.</b>	730 mm
<b>Munkadarab átmérője, max.</b>	210 mm
<b>Asztalterhelés, max.</b>	20 kg
<b>Hibahatár Hosszúság</b>	$MPE \leq (2.4 + l/200) \mu\text{m}; 'l' \text{ in mm}$
<b>Átmérő Hibahatár</b>	$MPE \leq (1.3 + d/150) \mu\text{m}; 'd' \text{ in mm}$
<b>Mérési értékek felbontása, hosszúság</b>	0.01 - 0.0001 mm
<b>Mérési értékek felbontása, átmérő</b>	0.01 - 0.0001 mm
<b>Szögfelbontás</b>	0.01 - 0.0001 °
<b>Referencia-hőmérséklet</b>	20 °C
<b>Szenzoregység</b>	optical
<b>Optikai rendszer</b>	telecentric precision optics, image field approx. 15 x 10 mm (W x H)
<b>Kamerarendszer</b>	CMOS matrix camera
<b>Különleges kivitel</b>	CNC table
<b>Mérszámítógép</b>	AIO PC or industrial AIO PC with UPS (each incl. Microsoft Windows 10 IoT LTSC)
<b>Üzemi hőmérséklet</b>	10 °C ig 35 °C
<b>Tárolási és szállítási hőmérséklet</b>	5 °C ig 60 °C
<b>Hangnyomásszint</b>	<75 dB(A)
<b>Páratartalom (szöveg)</b>	max. 70 %; non-condensing
<b>Hálózati feszültség</b>	90 - 240 V
<b>Hálózati frekvencia</b>	50/60 Hz
<b>Teljesítményfelvétel, max.</b>	850 W
<b>Szállítási lehetőségek</b>	suitable for air freight
<b>Szállítási terjedelem (szöveg)</b>	PC holder