


제품 정보

Optical devices with CNC table Mar4D PLQ 3200-T3

제품 특징

- Speed:
 - Extremely fast, mechanical-optical workpiece alignment by means of a fully automatic centering and tilting table in combination with the matrix camera
 - Axis movements with a unique speed of up to 200 mm/s
 - Very fast and high-resolution matrix camera with a large field of view of 15x10 mm (WxH) in effective combination with innovative probe systems
 - Joint evaluation of all collected measurement data via MarWin

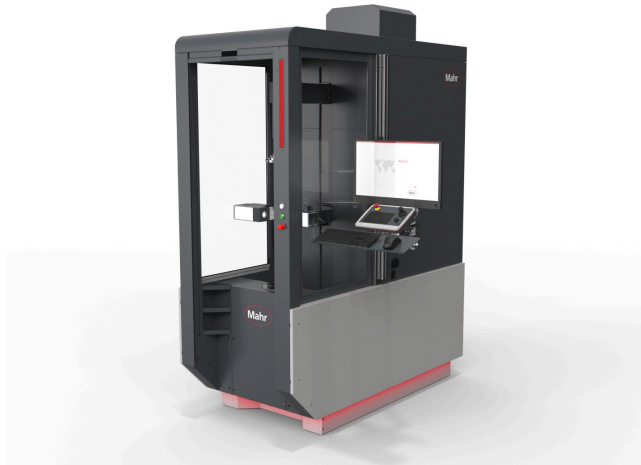

품목 번호: 5553203

- Productivity:
 - Workpieces that were not manufactured between tips are simply clamped in the chuck
 - Many different measuring functions combined in one device
 - Flexible workpieces with up to D=210 mm, L=730 mm and 20 kg measured directly in production next to the production machines
 - Increased measuring capacities and reduced waiting time
- Precision:
 - Compensation of eccentrics of several millimeters to 1 µm in less than 30 seconds
 - Integrated environmental controls, such as active temperature compensation of the device, ensure consistent measurement quality and significantly reduce waste
- User-friendliness:
 - The ergonomic housing and interior design enables convenient and gentle operation for many hours
 - Light curtains and interior monitoring protect people and measuring devices
 - All devices are "robot-ready" and automation solutions, such as robot loading, can be implemented quickly and directly via our specialized MES department

기술 데이터

Travel/measuring path X1 axis	200 mm
Pos.-/Meas. path Z-axis	730 mm
Positioning speed C-axis	0.2 - 60 1/min
Positioning speed X1 axis	0.5 - 200 mm/s
Positioning speed Z-axis	0.5 - 200 mm/s
Workpiece length max.	730 mm
Workpiece diameter max.	210 mm
Table load max.	20 kg
Error limit Length	MPE ≤ (2.4 + l/200) µm; 'l' in mm
Error limit diameter	MPE ≤ (1.3 + d/150) µm; 'd' in mm
Measured value resolution Length	0.01 - 0.0001 mm
Measured value resolution diameter	0.01 - 0.0001 mm
Angular resolution	0.01 - 0.0001 °
작동 온도	20 °C
Sensors	optical
Optical system	telecentric precision optics, image field approx. 15 x 10 mm (W x H)
Camera system	CMOS matrix camera
Special equipment	CNC table
Measuring computer	AIO PC or industrial AIO PC with UPS (each incl. Microsoft Windows 10 IoT LTSC)
작동 온도	10 °C - 35 °C
보관 및 운송 온도	5 °C - 60 °C
Sound pressure level	<75 dB(A)
습도 (텍스트)	max. 70 %; non-condensing
Mains voltage	90 – 240V
Mains frequency	50/60 Hz
전원 소모	850 W
Transportation options	suitable for air freight
공급 품목(텍스트)	PC holder