


제품 정보

Dimensional Metrology Mar4D PLQ 3200-T4 (Z=450/50 kg)

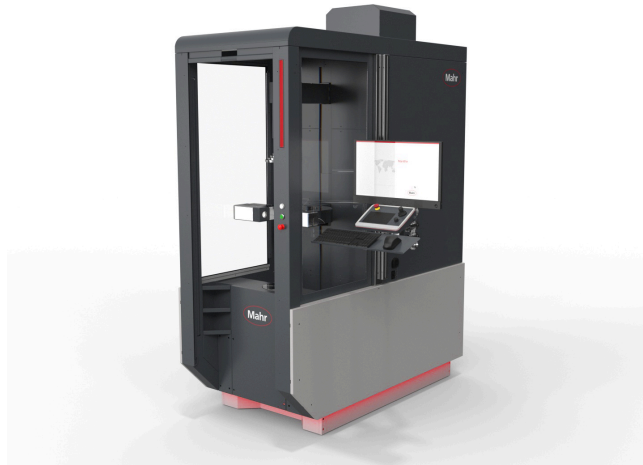

품목 번호: 5553254

기술 데이터

Verfahr-/Messweg X1-Achse	200
Verfahr-/Messweg Z-Achse	450
Positioniergeschwindigkeit C-Achse	0.2 - 60 1/min
Positioniergeschwindigkeit X1-Achse	0.5 - 200 mm/s
Positioniergeschwindigkeit Z-Achse	0.5 - 200 mm/s
Messwertauflösung Länge	0.01 - 0.0001 mm
Messwertauflösung Durchmesser	0.01 - 0.0001 mm
Winkelauflösung	0.01 - 0.0001 °
Tischbelastung max.	50
Fehlergrenze Länge	$MPE \leq (2.4 + l/200) \mu m$ with 'l' in mm
Fehlergrenze Durchmesser	$MPE \leq (1.3 + d/150) \mu m$ with 'd' in mm
Werkstücklänge max.	450
Workpiece diameter max.	210
측정물 무게(최대) (kg)	50
Netzspannung	90 - 240V
Netzfrequenz	50/60 Hz
전원 소모	850
Sensorik	optical
Optisches System	Telecentric precision optics, image field approx. 15 x 10 mm (W x H)
Kamerasystem	CMOS matrix camera
Messrechner	Standard panel PC or industrial panel PC with UPS, each with Microsoft® Windows® 10 IOT LTSC
Besondere Ausstattung	Fully automatic centering and tilting table, motorized tailstock with clamping force monitoring, PC holder and two 60° centering seats ($\varnothing 2 - 44$ mm) included with the device.
작동 온도	10 °C - 35 °C
보관 및 운송 온도	5 °C - 60 °C
Schalldruckpegel	<75 dB(A)
Transportmöglichkeiten	suitable for air freight