


Ürün bilgileri

Mobil yüzey ölçüm aleti MarSurf M 410

Ürün özellikleri

Simple, innovative, flexible – modern surface metrology for handheld use

- Handy roughness tester for mobile use
- Simple and intuitive operation: As easy as operating a smartphone
- Large, backlit 4.3" TFT touch display
- Rotatable display
- Magnetic probe holder: Fast probe arm change without tools
- Thanks to skidless probe: measurements of roughness as well as waviness – no extra measuring station required, determination of R, W and P parameters
- Simple alignment of the probe system: The inclination can be easily corrected using the menu-guided graphic instructions.
- Process and material safety thanks to automatic zeroing
- Micro USB interface for remote control via ASCII commands, e.g. via software for statistical process control
- USB-A interface for connecting e.g. a USB wireless adapter or the USB wireless printer
- Wireless transmission of measurement results via wireless stick to the free MarCom software
- Remote start of measurement via cable or wireless
- Connection of a scanner for automatic start of the measuring programs or reading of protocol texts via barcode or QR code
- Specification of the profile section label C in μm or in % of Rz for the characteristic values Rmr and tp/li>
- Data backup as TXT, X3P, CSV and PDF file
- Transmission of measurement protocols and data optionally via cable or wireless
- IATF 16949 compliant - secure traceability with MarConnect.
- Print directly to the mobile printer (as an option or directly in the set with printer)
- Creation of finished PDF protocols directly in the measuring device

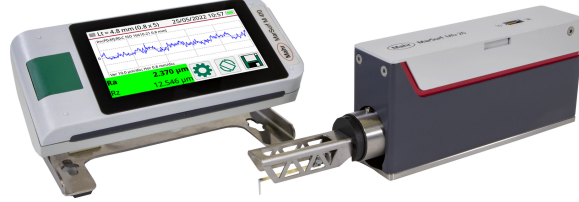

Malzeme no.: 6910291

Teknik veriler

| | |
|---|---|
| Hareket uzunluğu (Lt) | till 26 mm |
| Ölçme prensibi | Tactile stylus method |
| Unit of measurement | metrisch/inch |
| Ölçüm kuvveti (N) | 0.00075 |
| Probe tip radius | 2 μm |
| ISO/JIS'e göre filtre | Gaussian filter according to DIN EN ISO 16610-21, robust Gaussian filter according to DIN EN ISO 16610-31, special filter according to DIN EN ISO 13565-1, ls filter according to DIN EN ISO 3274 (can be switched off) |
| ISO/JIS'e göre Kesme lc | 0,08 mm, 0,25 mm, 0,8 mm, 2,5 mm, otomatik filtre algılama, değişken |
| ISO/JIS'ye uygun kısa strok | selectable |
| ISO/JIS'e göre örnekleme uzunluğu sayısı n | selectable: 1 to 16 |
| Ölçüm hızı | 0.1 mm/s - 1 mm/s |
| positioning speed X-axis max. | 3 mm/s |
| Konumlandırma hızı (mm/sn), X eksen | till 3 mm/s |
| Yüzey parametreleri | Über 55 Kennwerte für R-, P-, W-Profil gemäß aktueller Normung ISO/JIS/ASME/Motif |
| Enerji kaynağı | Integrated rechargeable battery (min. 1200 measurements) or via charging unit |
| Veri arabirimi | USB A, MarConnect (RS-232), SD / SDHC kartlar için Micro SD yuvası, 32 GB |

Ürün bilgileri

Mobil yüzey ölçüm aleti MarSurf M 410

- Customer-specific comments for the PDF log are entered directly on the MarSurf M 410
- MRK and ADK curve display and printing
- Measuring programs are saved (Quick & Easy)
- Mains-independent operation: over 1200 measurements without having to recharge the device
- Everything in the palm of your hand. Small size and low weight (approx. 500 g)
- Flexible device: Removable drive unit
- More than 50 parameters: Offer a performance range like a laboratory instrument.
- Quick access to your desired functions through favorites storage in the display
- Automatic cutoff selection: ensures correct measurement results even for the non-measuring technician
- Free software "MarWin Easy Roughness Viewer" for further documentation (statistics, multiple profiles and results on one page etc.) available for download on the Mahr website.

Teknik veriler

| | |
|--|--|
| Diller | Almanca, İngilizce, Fransızca, İtalyanca, İspanyolca, Portekizce, Felemenkçe, İsveççe, Rusça, Lehçe, Çekçe, Japonca, Çince, Korece, Macarca, Türkçe, Rumence |
| Depolama kapasitesi | min. 3900 profiles, min. 500,000 results, min. 1500 PDF logs, expandable with microSD card up to 32 GB (increases storage capacity by a factor of 320) |
| Prob | inductive skidless probe system |
| IP koruması kategorisi | IP 40 |
| Bağıl nem | 30 % to 85 %, non-condensing! |
| Ağırlık | 4.63 KG |
| Ağırlık ölçüm aleti | 300 g |
| Ağırlık tahrik ünitesi | 1120 g |
| Mm cinsinden boyutlar | 198 mm x 77 mm x 97 mm |
| Ölçüm aleti için mm cinsinden boyutlar (U x G x Y). | 162 mm x 77 mm x 35 mm |
| Tahrik ünitesi için boyutlar (U x G x Y), mm cinsinden. | 194 mm x 38 mm x 72 mm |
| Diğer | Lock/code word protection, date/time |
| Tarama ucu | 2 µm; 5 µm |
| Parametreler | Ra, Rq, Rz, Rz (JIS), Rz (Ry (JIS) Rz eşdeğeridir), Rmax, Rp, Rp (ASME), Rpm (ASME), Rv, R3z, Rk, Rpk, Rvk, Mr1, Mr2, A1, A2, Vo, Rt, RPc, Rmr (tp (JIS, ASME) Rmr eşdeğeridir), RSm, RS, Rdq, RSk, Rku, Rdc, RHtp, Pdc, Pa, Pt, PMr, Wa, Wq, WSm, WSk, Wt, CR, CF, CL, R, Ar, Rx, W, AW (MOTIF), Wx (MOTIF), Wte (MOTIF), NW (MOTIF), NR (MOTIF), NCRX (MOTIF), CPM (MOTIF) |
| Koruma sistemi | IP 40 |
| Şarj edilebilir piller | Li-Ion battery, 3.7 V, nominal capacity 11.6 Wh, min. 500 measurements |
| Geniş aralıklı güç kaynağı | 100 to 264 V |
| Ölçüm aralığı mm | 500 µm (±250 µm) for probe arm length 45 mm to 1500 µm (±750 µm) for probe arm length 135 mm |

Uygulama

Mechanical engineering

Bearings, shafts, racks, valves, various components from the engineering and precision mechanics industries

Automotive

Steering, brake systems, transmissions, crankshafts, camshafts, cylinder heads, cylinder blocks, turbochargers

Medical

Roughness measurement on hip and knee endoprostheses

Aerospace

Turbine components

Optics

Diverse optical components

Boyutlar

| | |
|------------------------------|------------------------|
| Mm cinsinden boyutlar | 198 mm x 77 mm x 97 mm |
|------------------------------|------------------------|

Ürün bilgileri

Mobil yüzey ölçüm aleti MarSurf M 410

Aksesuarlar

| Sipariş no. | Adı | Ürün tipi |
|-------------|---|-----------|
| 4102603 | Veri kablosu USB çift yönlü | DK-U1 |
| 6852403 | Probe arm | BFW |
| 6710803 | Dökme demir tabanlı 300 mm ölçüm standı | ST-D |
| 6710806 | Granit plakalı 300 mm ölçüm standı | ST-F |
| 6710807 | Granit plakalı ve T yuvalı 300 mm ölçüm standı | ST-G |
| 6710401 | V blok | PP |
| 6710604 | Paralel mengene | PPS |
| 6710529 | XY Tablası | CT 120 |
| 4246819 | Minyatür hassas mengene takımı | 109 PS |
| 6820420 | Mahr kalibrasyon sertifikası ile pürüzlülük standartı, profil derinliği 10 µm | PRN 10 |