

Product information

Digital micrometer Micromar 40 EWRI-R

Product features

- **Measuring surfaces: spherical anvil, planar spindle**
- High contrast digit display
- Stainless spindle is hardened throughout and ground
- Spindle and anvil are carbide-tipped
- Rapid drive
- Ratchet is integrated in the thimble
- Lacquered steel frame, heat insulated



Functions

RESET (set display to zero), ABS (display can be set to zero without losing reference to ORIGIN), mm/inch, ORIGIN (for entering a numerical value), LOCK function (key lock), TOL (Tolerance and Warning Limits Input), HOLD (freeze current measured value), DATA (data transmission), Bi-directional data interface (for data retrieval, transfer of parameters, remote control, individual function locks via MarCom software)

Item no.: **4157130**

Technical data

Measuring range mm	0 - 25 mm
Measuring range	0 - 1"
Resolution mm/inch	0.001 / .00005"
Error limit μm	4 μm
Measuring force (N)	5 - 10
Battery type	CR 2032 (3V Lithium)
Material Contact surface	carbide
Spindle diameter	6.5 mm
Spindle thread pitch_mm	0.5 mm

Package contains


setting standard (measuring range of 25-50 mm), battery, test certificate, instruction manual, case

Application

For measuring the thickness of pipe walls

Dimensions

Dimensions b in mm	9.5 mm
Dimensions a in mm	23 mm
Dimensions c in mm	31.5 mm

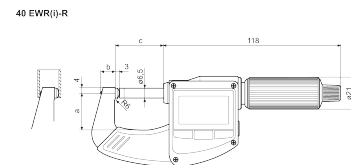

Accessories

Order no.	Designation	Product type
4102220	Wireless receiver for measuring instruments with integrated wireless	i-Stick